

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATE

BP 12/50 A



No pushing and pressing
Asphalt base plate



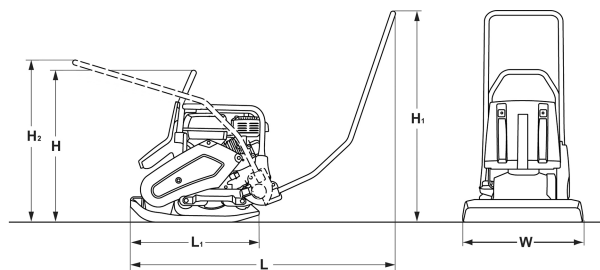
No sticking
Water spraying system with large
water tank (standard)



Extremely manoeuvrable
Central guide handle (optional)

Shipping dimensions in m3**BP 12/50 A**

0,195

**Standard Equipment**

- ☒ Highly wear resistant special base plate
- ☒ Sprinkler system
- ☒ Vibration insulated steering bow, foldable
- ☒ Detachable steering handle
- ☒ Automatic shutdown at low oil level
- ☒ Recoil starter
- ☒ Reinforced centrifugal clutch
- ☒ Single point lifting device
- ☒ Fully protected V-belt
- ☒ Carrying handles
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Transport wheels (+5kg)
- ☐ Tool kit
- ☐ Special painting
- ☐ Service Kit
- ☐ Steering handle centre-position (H2=900mm)
- ☐ TOUGH WARRANTY
- ☐ Comfort guide handle
- ☐ Central comfort guide handle

Dimensions in mm

	H	H1	H2	L	L1	W
BP 12/50 A	658	962	700	1084	545	500

Technical Data**BOMAG
BP 12/50 A****Weights**

Operating weight CECE	kg	82
Basic weight	kg	74

Dimensions

Working width	mm	500
---------------------	----	-----

Driving Characteristics

Working speed, max.	m/min	30
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer	Honda
Type	GX 120
Emission stage	StageV/CARB P.3
Cooling	air
Number of cylinders	1
Performance SAE J 1349	kW 2,6
Speed	min-1 3.600
Drive system	mech.
Fuel	Gasoline
Fuel comsump. aver. during operation	l/h 0,9

Exciter system

Frequency	Hz	100
Centrifugal force	kN	12
Amplitude	mm	1,10

Capacities

Fuel	l	2,0
Water	l	13,5

Technical modifications reserved. Machines may be shown with options.



PRE 230 20 010

300120 Sa04

BOMAG
 Hellerwald
 D-56154 Boppard
 P.O. Box 5162
 Tel. (0)6742 - 1000
 Fax (0)6742 - 3090

