

TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES

BPR 35/42, BPR 35/42 D



Robust and reliable
Best component protection



Precise and save to operate
Comfortable control lever



Simple and safe transport
Transport wheels (optional)

Shipping dimensions in m3

BPR 35/42 0,389


BPR 35/42 D 0,436

Standard Equipment

- ☒ Protective engine covering
- ☒ Comfortable control lever
- ☒ Height adjustable steering rod
- ☒ Low vibration steering rod
- ☒ Steering rod lockable in transport and working position
- ☒ Vibration and throttle regulation on the steering rod
- ☒ Highly wear-resistant, powder-coated base plate
- ☒ Fully protected V-belt
- ☒ Automatic decompression (BPR35/42D)
- ☒ Recoil starter
- ☒ Back-up drive protection
- ☒ Automatic shutdown at low oil level (BPR35/42)
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Engine protection hood (+10kg) (BPR35/42D)
- ☐ Transport wheels (+5kg)
- ☐ Electric starter+
- ☐ Hour meter (+20kg) (BPR35/42D)
- ☐ Tool kit
- ☐ Special painting
- ☐ Plastic mat
- ☐ Service Kit
- ☐ Hour meter (BPR35/42)

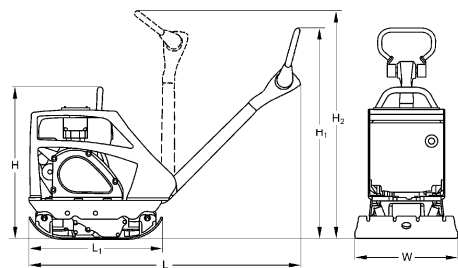

Dimensions in mm

	H	H1	H2	L	L1	W
BPR 35/42	660	1020	1150	1405	762	420
BPR 35/42 D	688	820	1220	1510	762	420

Technical Data

Weights

Operating weight CECE (W)	kg	190
Basic weight	kg	187

Dimensions

Basic working width	mm	420
Lowest passing height	mm	660
Min. height w. steering in top position	mm	1.020
Max. height w. steering in top position	mm	1.120

Driving Characteristics

Working speed, max.	m/min	27
Max. gradeability (dep. on soil con.)	%	32

Drive

Engine manufacturer	Honda	Hatz
Type	GX 160	1B20
Emission stage	Stage V / CARB P.	Stage V
Cooling	air	air
Number of cylinders	1	1
Performance SAE J 1349	kW	3,6
Performance ISO 3046	kW	3,1
Speed	min-1	3.600
Drive system	mech.	mech.
Fuel	Gasoline	Diesel
Fuel comsump. aver. during operation	l/h	1,1

Exciter system

Frequency	Hz	80
Centrifugal force	kN	35
Amplitude	mm	1,30

Capacities

Fuel	l	3,1
------	---	-----

Technical modifications reserved. Machines may be shown with options.



PRE 695 41 010

240523 Sa01

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

