

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BVP 10/36



Compact

Guide handle fully foldable



Robust and reliable

V-belt all around protected against damage

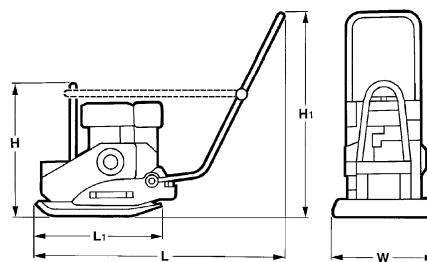


Safe transport

Transport handles (standard) and transport wheels (optional)

Shipping dimensions in m3**BVP 10/36**

0,146

**Standard Equipment**

- ☒ Vibration insulated steering handle, foldable
- ☒ Detachable steering handle
- ☒ Highly wear resistant base plate
- ☒ Automatic shutdown at low oil level
- ☒ Recoil starter
- ☒ Single point lifting device
- ☒ Fully protected V-belt
- ☒ Carrying handles
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Sprinkler system (+7kg)
- ☐ Transport wheels (+4kg)
- ☐ Plastic mat
- ☐ Tool kit
- ☐ Service Kit
- ☐ TOUGH WARRANTY
- ☐ Comfort guide handle
- ☐ Special painting
- ☐ Engine protection frame

Dimensions in mm

	H	H1	L	L1	W
BVP 10/36	535	915	1115	558	360

Technical Data**BOMAG
BVP 10/36****Weights**

Operating weight CECE	kg	83
Basic weight	kg	82

Dimensions

Working width	mm	360
---------------------	----	-----

Driving Characteristics

Working speed, max.	m/min	25
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer	Honda
Type	GX 120
Emission stage	Stage V / CARB P.3
Cooling	air
Number of cylinders	1
Performance SAE J 1349	kW 2,6
Speed	min-1 3.600
Drive system	mech.
Fuel	Gasoline
Fuel comsump. aver. during operation	l/h 0,9

Exciter system

Frequency	Hz	90
Centrifugal force	kN	10
Amplitude	mm	1,36

Capacities

Fuel	l	2,0
Water	l	7,0

Technical modifications reserved. Machines may be shown with options.



PRE 834 13 010

030423 Sa03

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

