

TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES

BPR 40/60 D



Maximum longevity

Full protection hood - engine and components protected all around



Precise and save to operate

BOMAG Comfortable control lever



Safe transport

Transport wheels (optional)

Shipping dimensions in m3

BPR 40/60 D


0,623

Standard Equipment

- ☒ Fully closed engine protection hood made of high-strength steel
- ☒ Comfortable control lever
- ☒ Height adjustable steering rod
- ☒ Low vibration steering rod
- ☒ Steering rod lockable in transport and working position
- ☒ Vibration and throttle regulation on the steering rod
- ☒ Highly wear-resistant, powder-coated base plate
- ☒ Fully protected V-belt
- ☒ Automatic decompression
- ☒ Recoil starter
- ☒ Hour meter (Electric starter)
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Transport wheels (+5kg)
- ☐ Electric starter (+20kg)
- ☐ Tool kit
- ☐ Special painting
- ☐ Plastic mat
- ☐ Service Kit

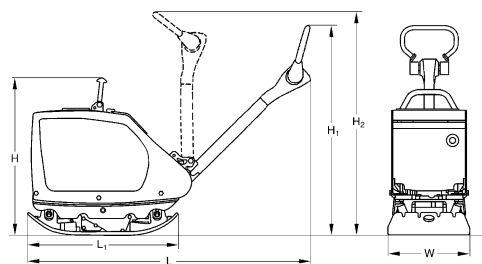

Dimensions in mm

	H	H1	H2	L	L1	W
BPR 40/60 D	688	820	1220	1510	762	600

Technical Data

BOMAG BPR 40/60 D

Weights

Operating weight CECE (W)	kg	260
Basic weight	kg	257

Dimensions

Basic working width	mm	600
Lowest passing height	mm	688
Min. height w. steering in top position	mm	820
Max. height w. steering in top position	mm	1.120

Driving Characteristics

Working speed, max.	m/min	27
Max. gradeability (dep. on soil con.)	%	32

Drive

Engine manufacturer	Hatz
Type	1B20
Emission stage	Stage V
Cooling	air
Number of cylinders	1
Performance ISO 3046	kW 3,1
Speed	min-1 3.000
Drive system	mech.
Fuel	Diesel
Fuel consump. aver. during operation	l/h 0,7

Exciter system

Frequency	Hz	80
Centrifugal force	kN	40
Amplitude	mm	1,40

Capacities

Fuel	l	3,0
------	---	-----

Technical modifications reserved. Machines may be shown with options.



PRE 692 93 010

240523 Sa03

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

