

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BP 25/50



Compact

Guide handle without tool folding - fits in any car boot



Plug and Play retrofit kits

Assembly in no time at all - machine can be individually customised




All-round protection

Protective bar and cyclone filter (GX 160) as standard

Shipping dimensions in m3

BP 25/50

0,224

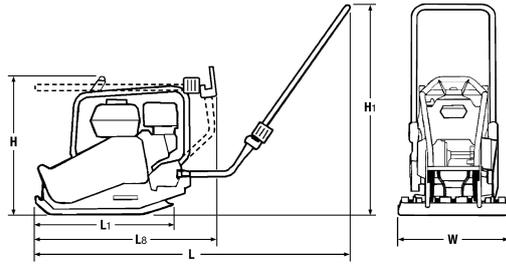

Standard Equipment

- Vibration insulated steering handle, foldable
- Detachable steering handle
- Hand-arm vibrations <5m/s²
- Cyclone dust separator
- Engine protection frame
- Automatic shutdown at low oil level
- Highly wear resistant base plate
- Recoil starter
- Fully protected V-belt
- Carrying handles
- Single point lifting device
- 3-2-1 Warranty

Optional Equipment

- Sprinkler system (10l)
- Sprinkler system (7l)
- Spraying system, base plate (500mm)
- Transport wheels
- Vulcolan mat
- Hour meter
- Special painting
- Service Kit
- Tool kit

Dimensions in mm

	H	H1	L	L1	L8	W
BP 25/50	568	862	1276	558	789	500

Technical Data

**BOMAG
BP 25/50**

Weights

Operating weight CECE	kg	110
Basic weight	kg	110

Dimensions

Working width	mm	500
---------------------	----	-----

Driving Characteristics

Working speed, max.	m/min	30
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer	Honda
Engine type	GX 160
Emission stage	Stage V / CARB P.3
Cooling	air
Number of cylinders	1
Performance SAE J 1349	kW 3,6
Speed	min-1 3.600
Drive system	mech.
Fuel	Gasoline
Fuel consump. aver. during operation	l/h 1,1

Exciter system

Frequency	Hz	90
Centrifugal force	kN	25
Amplitude	mm	2,00

Capacities

Fuel	l	3,1
------------	---	-----

Technical modifications reserved. Machines may be shown with options.



PRE 834 97 010

280525 Sa

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

